




National Sanitation Foundation (NSF) certified & rated lighting solutions for food processing environments. NSF International Standard establishes minimum food protection and sanitation requirements for the materials, design, fabrication, construction, and performance of food handling and processing equipment.

SPECIFICATION

Power Consumption	36 W
Total Luminous Flux	4400 lm
Luminous Efficacy	120 lm/W
Input Voltage	120 ~ 277 VAC
Average Lifespan Hours	50,000 hrs
Correlated Color Temperature	4000K / 5000K
Color Rendering Index	≥85 Ra
Beam Angle	120 °
Installation Type	Surface or Suspended
Dimming	0 – 10V Dimmable
Luminaire Material	Aluminum, Polycarbonate
Certification	UL, LightingFacts, DLC, NSF, FCC
DLC Category	Indoor Luminaires Linear Ambient Direct Linear Ambient Luminaires
Dimension	1200(W) x 109(H) x 84.8(D) mm 47.24" x 4.29" x 3.33"
Weight	3.5 kg / 7.71 lb


LIGHT DISTRIBUTION

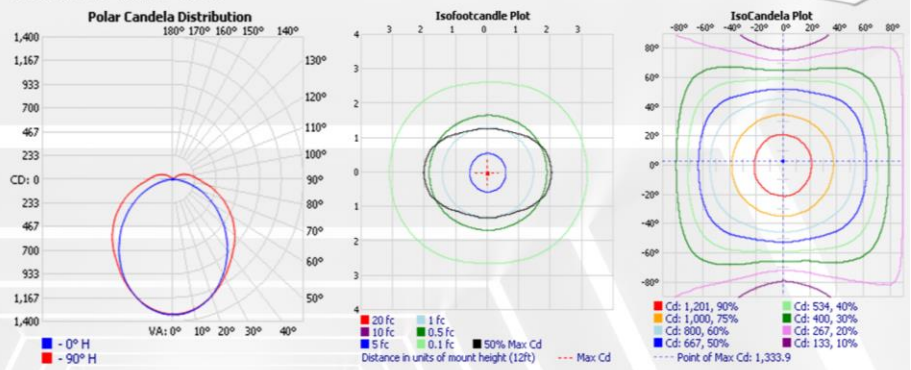

APPLICATION



DIMENSIONAL DRAWING

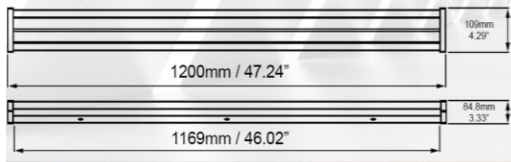


PLIANT TS Series


2x2 Edge-Lit LED Flat Panel 35W

Model Number: PL-TS-22-EFP-35-4K, PL-TS-22-EFP-35-5K




Features:

- ETL, DLC, LightingFacts, FCC
- Aesthetically pleasant & Uniform brightness
- Slim, Low-Profile, Lightweight
- Emergency Battery & Ballast(Optional)
- High Efficacy up to 130 lm/W
- 0 - 10V Dimmable / 100 ~ 277 VAC
- Available in Silver or White / CCT: 4000K, 5000K
- Recessed, Surface, Suspended
- 5-Year Limited Warranty




SPECIFICATION

Power Consumption	35 W
Total Luminous Flux	4500 lm
Luminous Efficacy	130 lm/W
Input Voltage	100 ~ 277 VAC
Input Frequency	50 ~ 60 Hz
Beam Angle	120 °
Operating Temperature	-20 ~ 40 °C / -4 ~ 104 °F
Average Lifespan Hours	50,000 hrs
Correlated Color Temperature	4000 K / 5000 K
Color Rendering Index	≥80 Ra
Dimming	0 - 10 V Dimmable
Installation Type	Recessed / Surface / Suspended
Certification	ETL, DLC, LightingFacts, FCC
DLC Classification	DLC Premium
DLC Category	2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces
Dimension	603 x 603 x 10 mm / 23.74" x 23.74" x 0.4"
Weight	3.8 kg / 8.37 lb

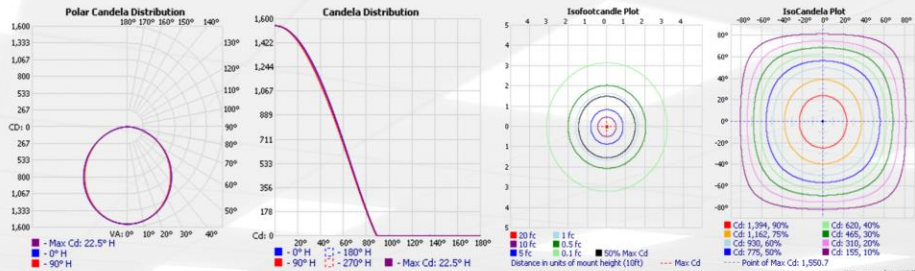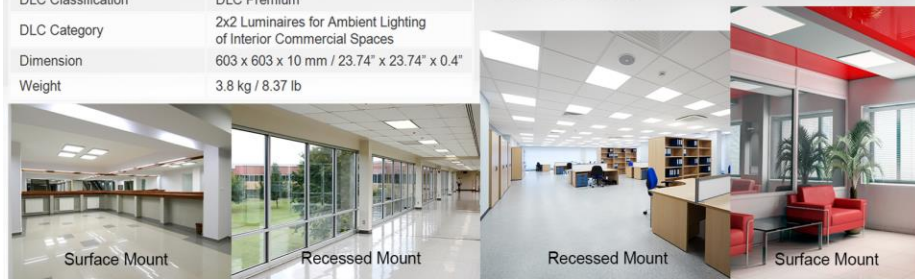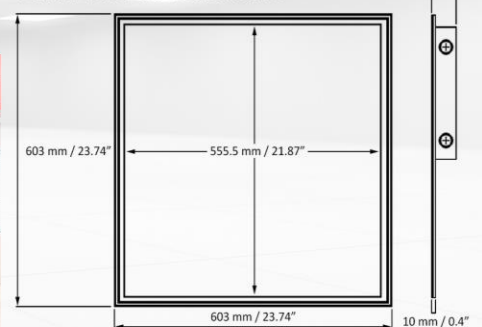LIGHT DISTRIBUTION

APPLICATION

DIMENSIONAL DRAWING


PLIANT RT Series

LED Wall Wash Luminaire 100W, 150W

Model Number: PL-RT-WW-100, PL-RT-RWW-100, PL-RT-WW-150, PL-RT-RWW-150

Features:

- cULus, LightingFacts, FCC, CE
- Reimagines LED Lighting w/ Multiple Mounting Options
- Universal & Scalable Indoor/Outdoor LED Wall Wash
- Single Aluminum Extruded Heat Sink
- Superior Thermal Management
- Suitable as Wall Wash, Flood, Wall Pack, etc.
- Slim, Low-Profile Design & Lightweight
- 100-277V Universal Voltage
- 7 Different Beam Angles
- 5-Year Limited Warranty



SPECIFICATION


	100W	150W
Power Consumption	100W	150W
Total Luminous Flux	11000 lm ~ 12000 lm	16500 lm ~ 18000 lm
Luminous Efficacy	110 ~ 120 lm/W	
Input Voltage	100 ~ 277 VAC	
Beam Angle	15°, 25°, 40°, 60°, 90°, 100x90°, 140x70°	
Operating Temperature	-20 ~ 40° Celsius / -4 ~ 113° Fahrenheit	
Average Lifespan Hours	50,000 hrs	
Correlated Color Temperature	4000 K, 5000 K, RGB Available	
Color Rendering Index	≥83 Ra	
Ingress Protection Code	IP67	
Dimming	0 ~ 10 V Dimmable (Optional)	
Luminaire Color	Black, White	
Installation type	Surface Mountable w/ 210 Degree Adjustable Bracket	
Certification	cULus, LightingFacts, FCC, CE	
DLC Category	Outdoor Luminaires High Output Architectural Flood and Spot Luminaires	
Dimension	567 x 85 x 189.9 mm 22.32" x 3.34" x 7.47"	849 x 85 x 189.9 mm 33.42" x 3.34" x 7.47"
Weight	4 kg / 8.81 lb	4.5 kg / 9.92 lb

APPLICATION

With various mounting options, the RT Series LED Luminaire can be installed as: Wall Wash, High Bay, Flood Light, Gas Station Canopy, Shoebox, etc.



LIGHT DISTRIBUTION

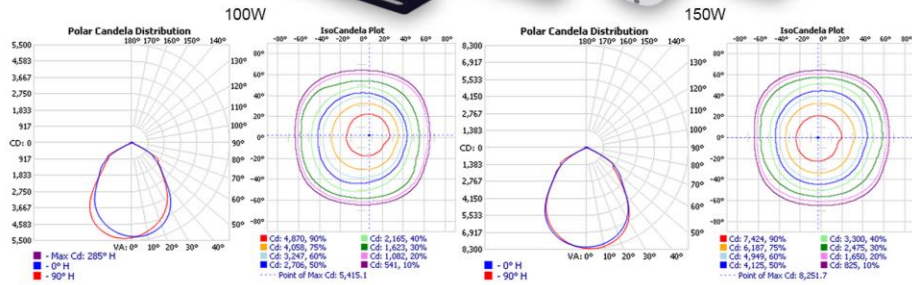

DIMENSIONAL DRAWING

